

External USB FDD

Universal Serial Bus Interface

UF0002 SERIES



Product Outline

Dimension	103 x 142 x 17mm
Weight	280g
Interface	USB Specification Rev 1.1
Power	Max. 500mA (Bus Power)
Voltage	4.75 to 5.25 V (Bus Power)
Supported Format	3 mode
Supported OS	Windows 98 / 98SE Windows ME Windows 2000 Windows XP Windows NT4.0 (Optional)



Empowered by Innovation

NEC



Completely detached - but
securely connected with USB

Safety Regulations

Comply with UL / cUL / TUV / FCC / CE /
VCCI / BSMI / SEMKO

Colors


Available in Gray / Black / Silver

Mechanical Specification

Dimension 103(W) x 142(L) x 17(H)

Cable Length 300 mm

Weight 280 g

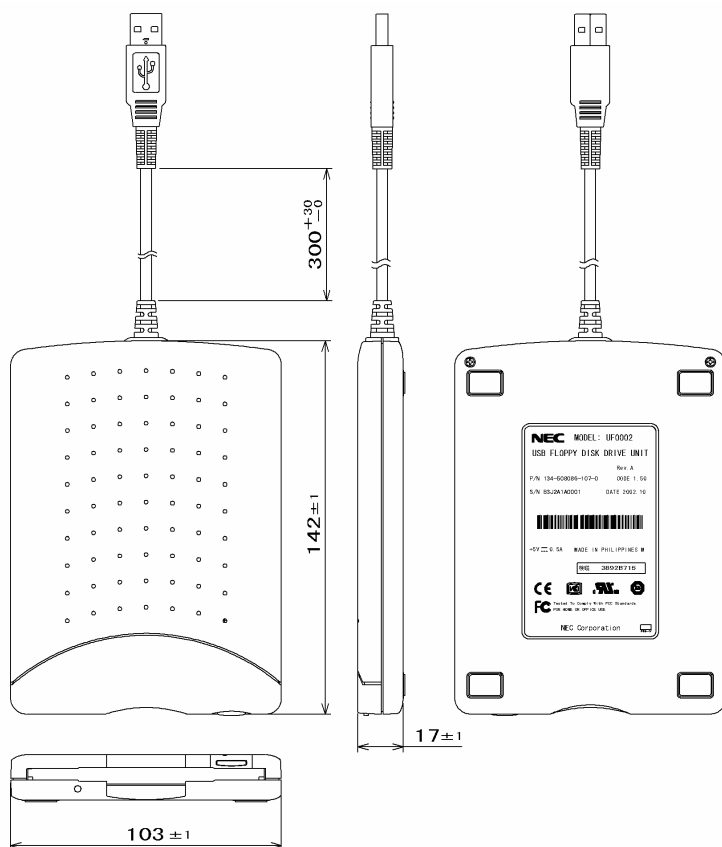

Environment Specification

Temperature

Operational 5~35 deg C

Non-Operational -20~-60 deg C

Humidity

Operational 20~80%RH (Non condensing)

Non-Operational 10~90%RH (Non condensing)

Shock

Operational (Duration : 11ms Wave form : 1/2 Sine): 49.0m/s² (5G)

Non-Operational (Duration : 11ms Wave form : 1/2 Sine): 980.7m/s² (100G)

Vibration

Operational (5 to 500Hz) : 4.9m/s² (0.5G)

Non-Operational (5 to 500Hz) : 19.6m/s² (2G)

Reliability

MTTF : 30,000POH